


QUICK NAVIGATION GUIDE

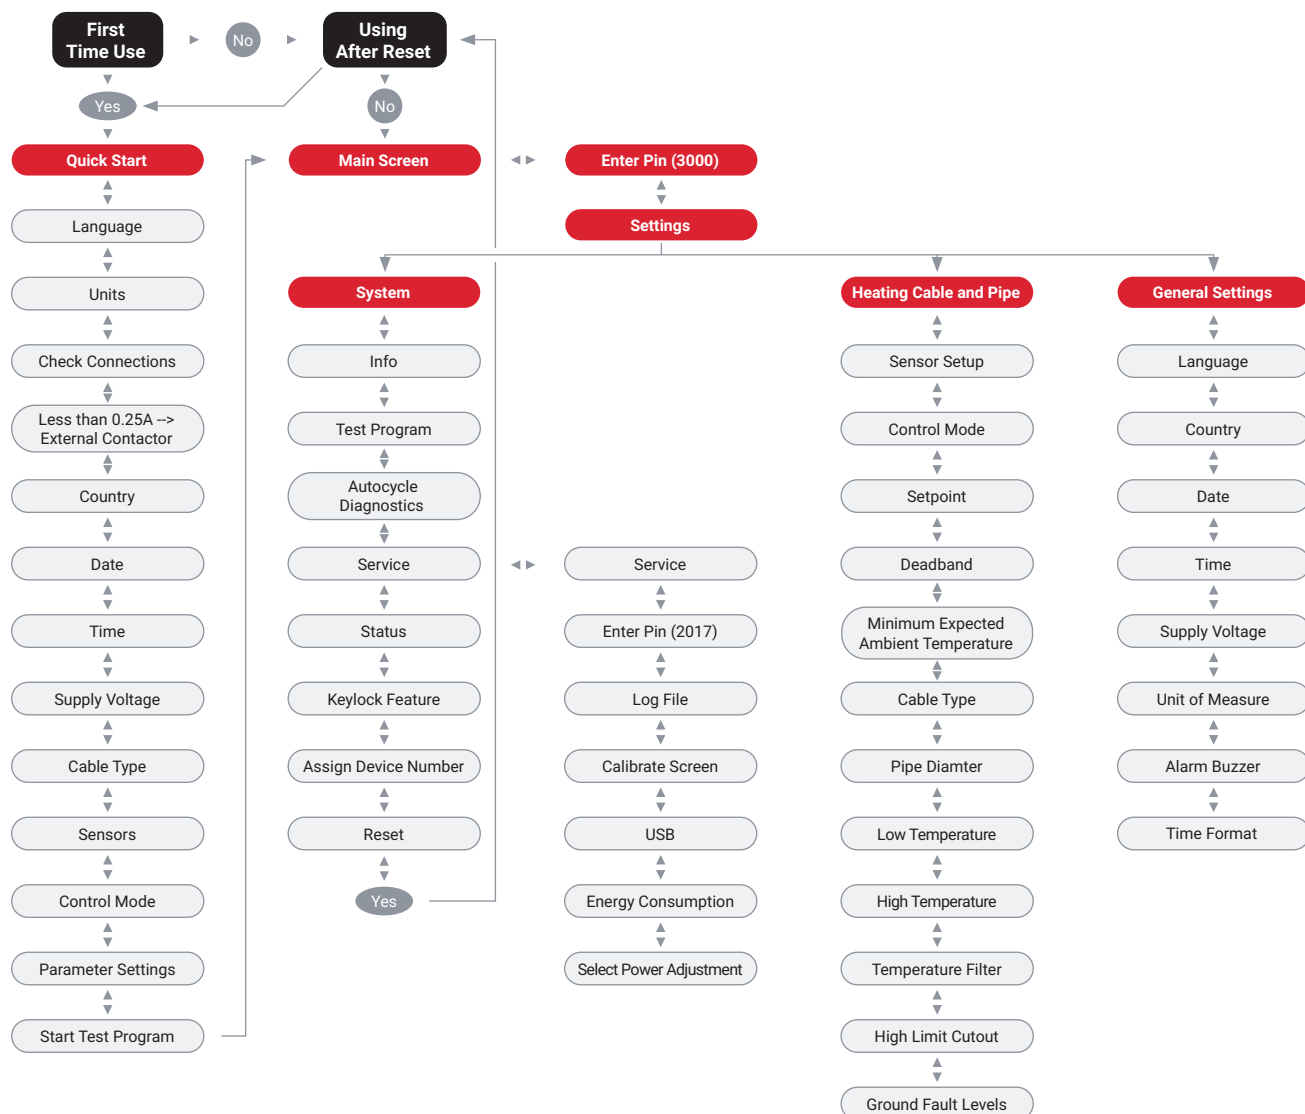

Parameter	Factory Default	User Setting
Sensor 1		
Ambient Sensing	N/A	
Line Sensing	N/A	
High Limit Cutout	N/A	
Low Temperature	35°F (2°C)	
High Temperature	110°F (43°C)	
High Limit Cutout Temperature	185°F (85°C)	
Temperature Filter	10 s	

Sensor 2		
Ambient Sensing	N/A	
Line Sensing	N/A	
Power On TS Fail	N/A	
Low Temperature	35°F (2°C)	
High Temperature	110°F (43°C)	
High Limit Cutout Temperature	185°F (85°C)	
Temperature Filter	10 s	

Other Parameters:		
Keylock Feature	On	On
Device Number	0	
Control Mode	N/A	
Setpoint	40°F (4°C)	
Deadband	5°F (3°C)	
Min. Expected Ambient Temperature	20°F (-7°C)	
Cable Type	N/A	
Pipe Diameter	0.5 in	
Ground Fault Alarm Level	20mA	
Ground Fault Trip Level	30mA	
Power Adjustment Factor	100%	
Supply Voltage	N/A	
Unit of Measure	N/A	
Time Format	N/A	
Autocycle	Never	
Alarm Buzzer	Off	

This quick navigation guide is intended to provide the user a snapshot of the user interface menus, to help program the controller and record/access the user settings. Please refer to nVent RAYCHEM 460 Installation and Operational Manual (H60791) for the complete definitions, installation instructions, specifications, warnings and safety information.

© 2020 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without notice.
RAYCHEM-AR-H60793-460QuickNavGuide-EN-2007