


## EAVE PANEL SYSTEM FOR CONCEALED ROOF & GUTTER DE-ICING

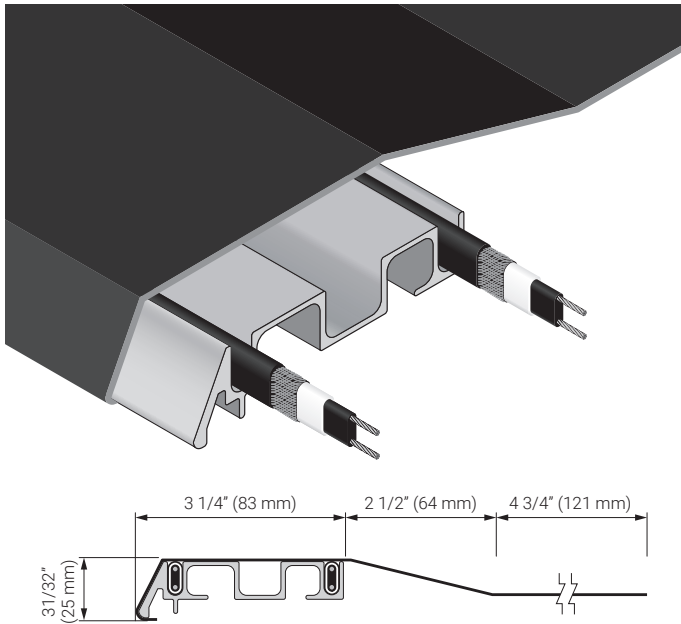

### PRODUCT OVERVIEW

nVent RAYCHEM brand Roof Ice Melt (RIM) systems are designed to eliminate icicles and ice dam problems in wide range of applications.

RIM2-Eave (RIM2-E) system is used for snow melt on roof eaves. The system consists of RAYCHEM WFP heating cable, Aluminum extrusion designed to fit the cable and a cover panel for efficient heat transfer. The RIM2-E system uses 2 runs of WFP cable providing adequate power output necessary for moderate snow load areas.

RIM systems provide:

- Long term roof deicing solution by mechanically protecting the heating cable
- Aesthetically pleasing solution by concealing the heating cable and complete snow melt along the roof eave
- High performance and reliable solution for moderate snow load areas



### CATALOG NUMBER

RIM2-E, Eave System, copper  
RIM2-E, Eave System, aluminum

### CONTENTS

RIM2-E  
Extrusion (1 ft per foot of RIM2-E)  
Cover Panel (1 ft per foot of RIM2-E)  
WFP Heating Cable (2 ft per foot of RIM2-E)

### MATERIALS OF CONSTRUCTION

Extrusion Aluminum  
Cover Panel Aluminum (available in 30 colors). Refer to RAYCHEM RIM Color guide H59379 Copper Custom (Corten, Zinc, Lead coated copper etc.)

### ADDITIONAL MATERIALS (AS REQUIRED)

Power Connection kits (WPCK-R) Contains a heat shrink power connection and end seal designed for RIM systems  
Splice/Tee Connection kits (WSTK) Heat shrink splice or tee kit designed for RIM systems  
Eave Splice Covers (RIM2-EPSC) Splice covers to cover the panel joints on the eaves  
Eave Panel End Brackets (RIM2-EPEB) End brackets to cover the ends of eave panels  
Note: Only approved connection kits and accessories must be used with RIM Systems. Refer to RIM design guide (H59561) for proper selection.

## PRODUCT SPECIFICATIONS (NOMINAL)

Power Output	16 W/ft of RIM2-E (52 W/m of RIM2-E) in snow or ice
Minimum Installation Temperature	0°F (-18°C)
Overall Cover Dimensions	Width: 11 in (279 mm) Thickness: 31/32 in (25 mm)
Overall Extrusion Dimensions	Width: 3 1/8 in (79 mm) Thickness: 5/8 in (16 mm)
Weight	2035 lb/1000 ft (3028 kg/km)

## HEATING CABLE SPECIFICATIONS (NOMINAL)

Voltage	WFP-612: 120 Vac
	WFP-622: 208- 277 Vac
Minimum Bend Radius	5/8 in (16 mm)

## CABLE SELECTION

Model number	Operating voltage	Power output in Snow/Ice (nominal)	Maximum circuit length vs Breaker size			
			20A CB		30A CB	
			@ 0°F	@ 32°F	@ 0°F	@ 32°F
WFP-612	120 Vac	8 W/ft	130 ft	165 ft	195 ft	240 ft
WFP-622	208-277 Vac	8 W/ft	270 ft	330 ft	405 ft	480 ft

Note: For 208 Vac application, multiply power output at 240 Vac by 0.85.  
For 277 Vac application, multiply power output at 240 Vac by 1.12.

## APPROVALS

The WFP-612 and WFP-622 heating cables are UL Listed and CSA Certified only when used with the appropriate agency-approved nVent connection kits and accessories. For approvals information, refer to the WFP heating cable data sheet H59576.

## GROUND-FAULT PROTECTION

To minimize the danger of fire from the sustained electrical arcing if the heating cable is damaged or improperly installed, and to comply with the requirements of nVent, agency certifications, and national electrical codes, ground-fault equipment protection must be used on each heating cable branch circuit. Arcing may not be stopped by conventional circuit protection. Many RAYCHEM control and monitoring systems meet the ground-fault protection requirement.

## North America

Tel +1.800.545.6258  
Fax +1.800.527.5703  
thermal.info@nvent.com



nVent.com

Our powerful portfolio of brands:

CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER